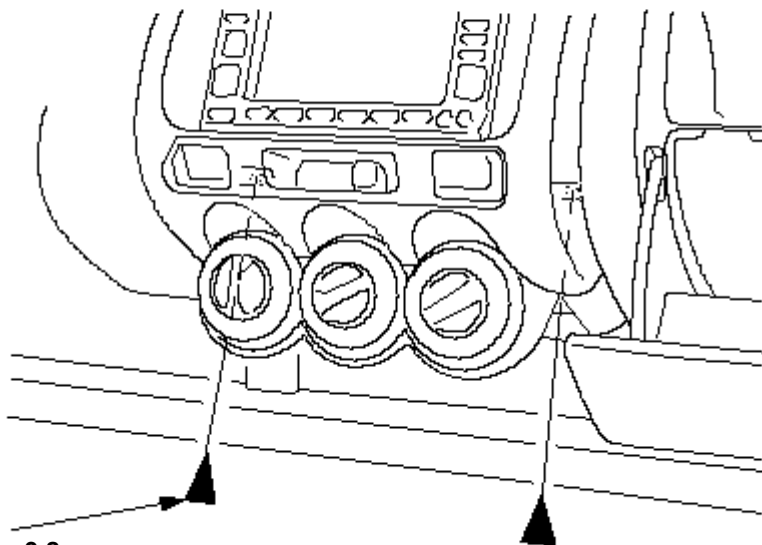

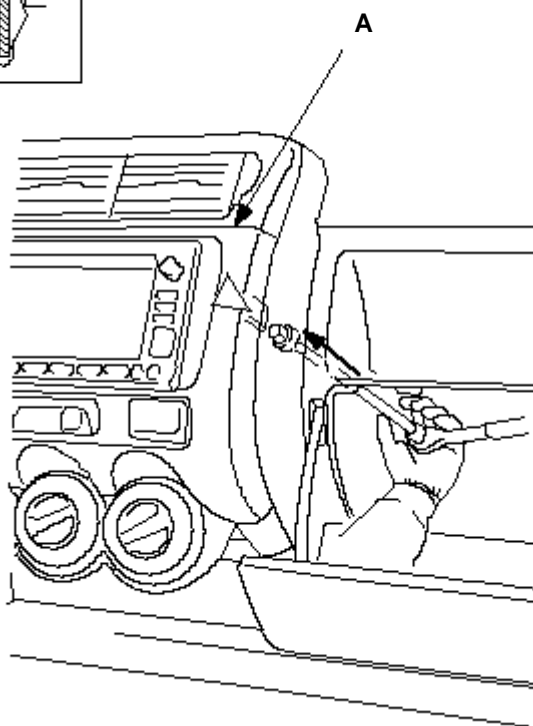


Fastener Locations**► : Bolt, 2**

**5 x 0.8 mm
5 N·m
(0.5 kgf·m, 4 lbf·ft)**

6. Using a wrench, carefully insert a wrench from the inner glove box opening, and push a panel clip on the glove box side from back of the center panel (A) to release it. LHD is shown, RHD is symmetrical.


Fastener Locations**► : Clip, 1**

7. Pull out the center panel (A) to release the clips (B, C), and disconnect the heater control switch connector (D), antenna lead (E), rear defogger switch connector (F) and if equipped, navigation unit connectors (G) and GPS antenna connector (H). Detach the harness clips (I) from both center panel brackets. Then remove the center panel:

- Take care not to bend any cables.
- LHD with navigation is shown, RHD is symmetrical for the most part, and if equipped with no navigation, disconnect the audio unit connector.

Fastener Locations

B ▷ : Clip, 8 C ▷ : Clip, 1

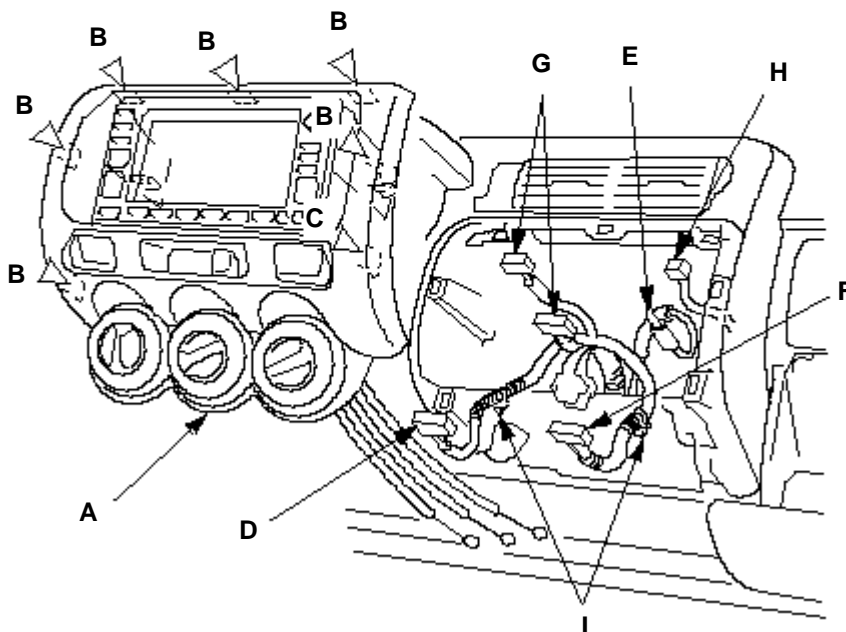

8. Install the panel in the reverse order of removal, and make sure each connector is plugged in properly, and antenna lead and cables are connected properly.